

Molded Case Circuit Breakers


Characteristic curves

UL Listed



■ S series, 2, 3-pole

SA50RCUL



Rated current : 5, 10, 40A

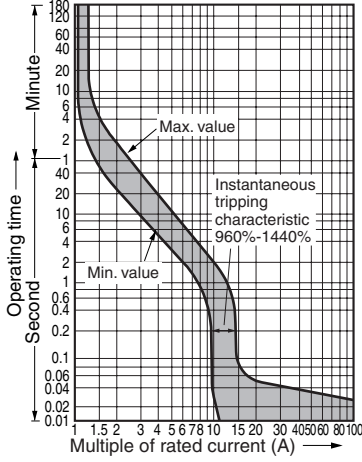



Rated current : 3, 15, 20, 30, 50A

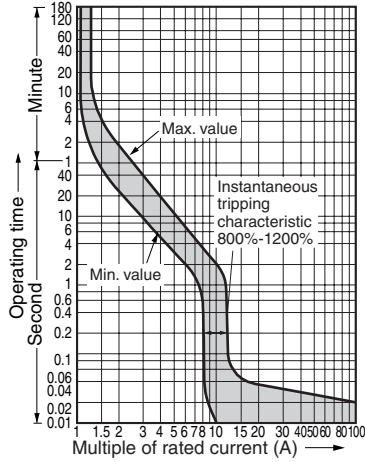



SA100CUL

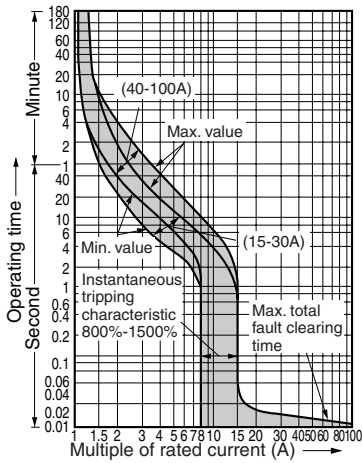



SA100RCUL

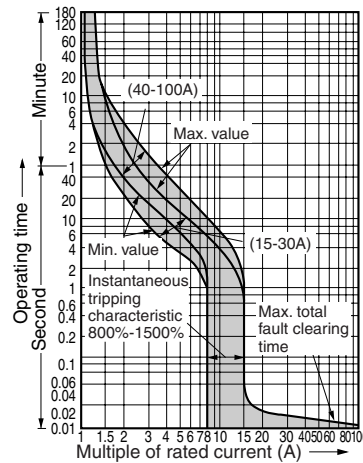

SA225CUL


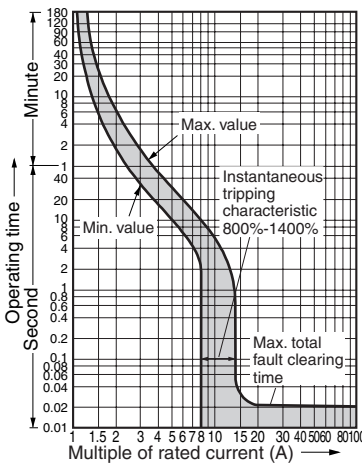


SA225RCUL


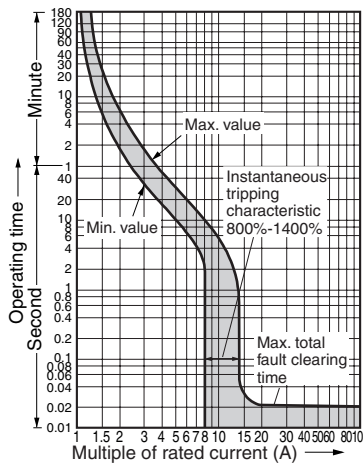


■ S series, 2, 3-pole



SA400CUL

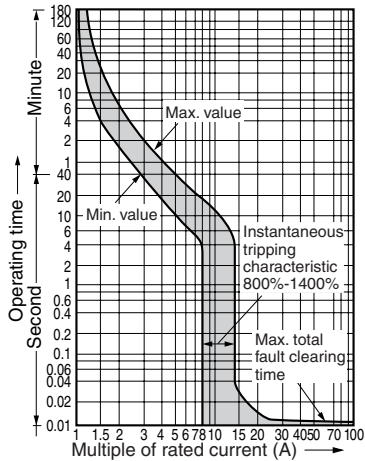



SA400RCUL

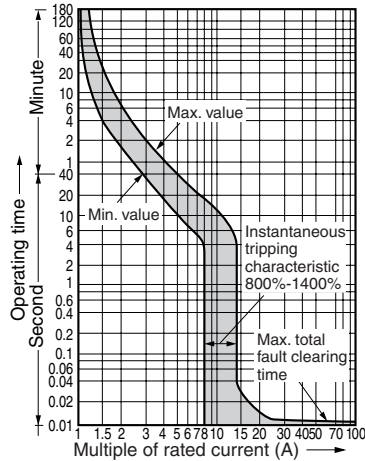

SA600RCUL

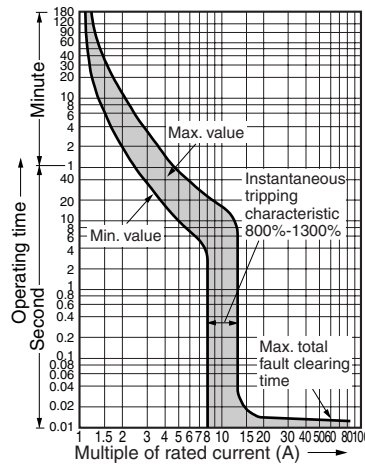


SA800RCUL

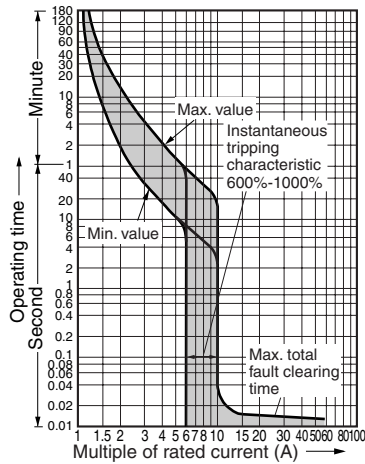

■ E series, 2, 3-pole

EA100CUL

Rated current : 5, 10, 40, 60, 70, 75, 80, 90A

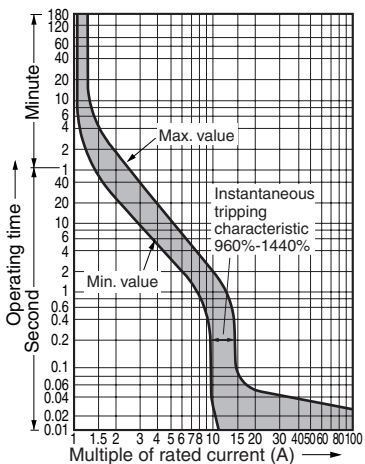

Rated current : 3, 15, 20, 30, 50, 100A

