

Molded Case Circuit Breakers


Characteristic curves

UL Listed



■ S and E series, 2, 3-pole

SA50RCUL, EA100CUL



Rated current : 5, 10, 40, 60, 70, 75, 80, 90A

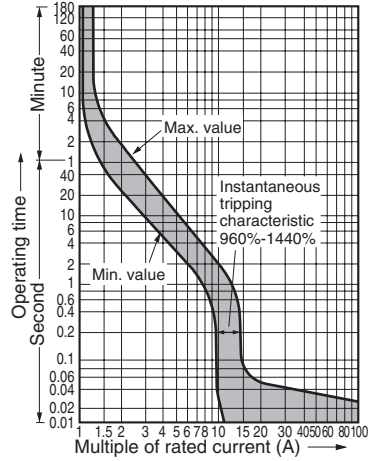



Rated current : 3, 15, 20, 30, 50, 100A

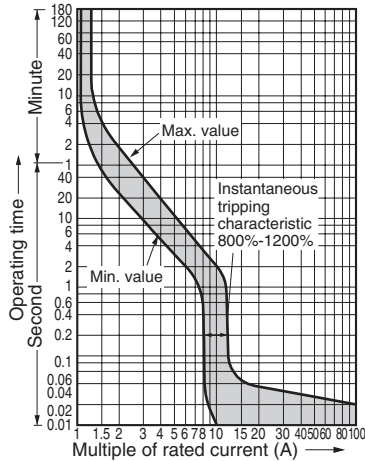

SA100CUL, SA100RCUL


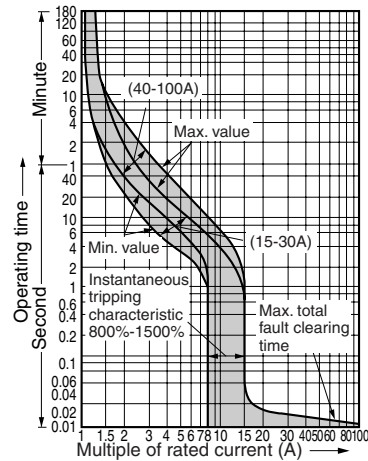


SA225CUL, SA225RCUL


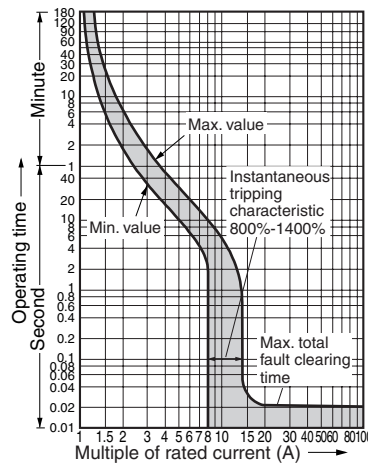


■ S series, 2, 3-pole



SA400CUL, SA400RCUL

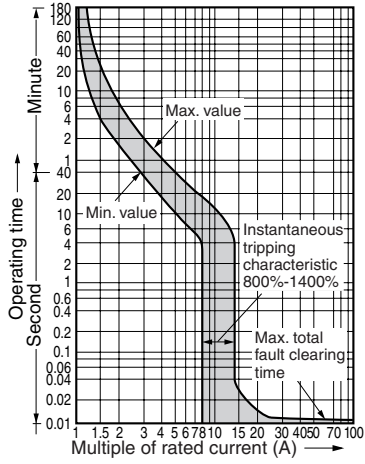

SA600RCUL

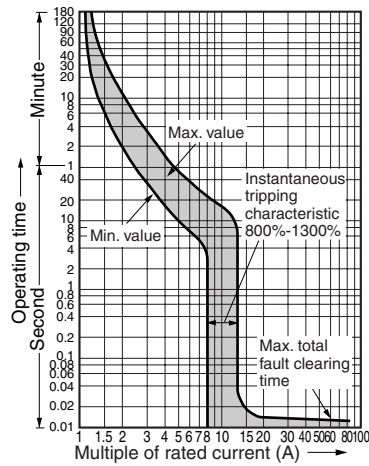

SA800RCUL

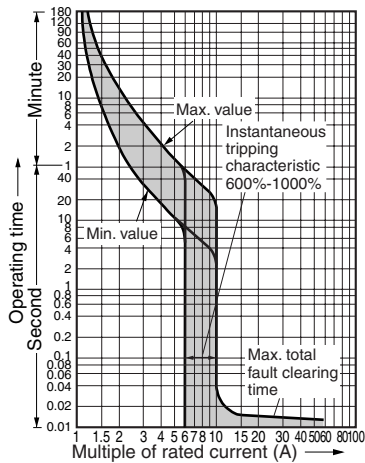

06